
Lifting Solutions Group
Axel Johnson International

Superplast8

Product information

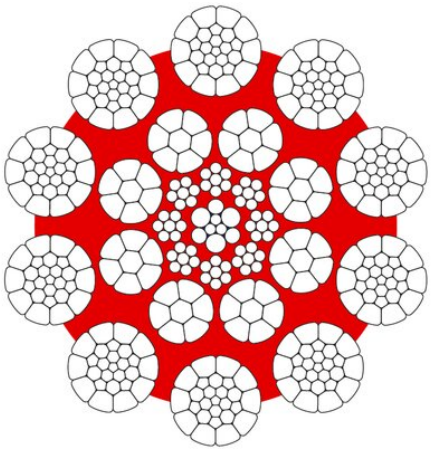

Typical Applications: Very high breaking load and good resistance against drum crushing. Hoisting rope in multiple part reeving for smaller lifting heights as well as for twin hoist systems with left and right hand lay ropes for greater lifting heights.

Design: Ordinary lay and lang's lay, available in right and left hand. Suitable for multi-layer spooling

Fill Factor: 0,69
Temperature range of use: -50°C to + 115°C

... *Read more*

Rope construction: 10 outer strand rope
Finish: Galvanised or ungalvanised

Fill factor: 0.69

Certex Lifting
info@certexlifting.com.au
1800 237 839

© November 2026 - All Rights Reserved