
Lifting Solutions Group
Axel Johnson International

Steel wire rope HD8K-PPI

Product information

sZ G

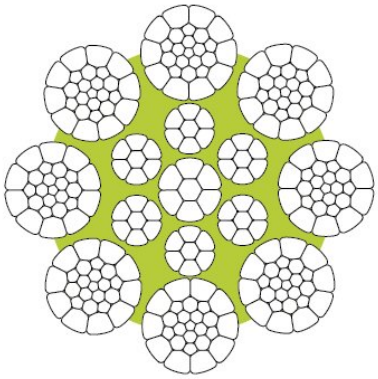

Typical applications: When rotation resistant ropes are not required (twin hoist systems with right and left ropes, small heights). Hoist for steel mill cranes, container cranes, floating cranes and boom hoist for deck cranes, luffing and mobile cranes, grab cranes.

... *Read more*

Temperature range: -50°C up to +75°C

Certex Lifting
info@certexlifting.com.au
1800 237 839

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Steel wire rope HD8K-PPI

Technical data

Part Code	Rope diameter	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Weight kg/100m
103102004270640	20	1,960	Galvanized	sZ	355.5	1.84

Certex Lifting
info@certexlifting.com.au
1800 237 839

© November 2026 - All Rights Reserved