


Steel wire rope HD8K-PPI

Product information

SZ G

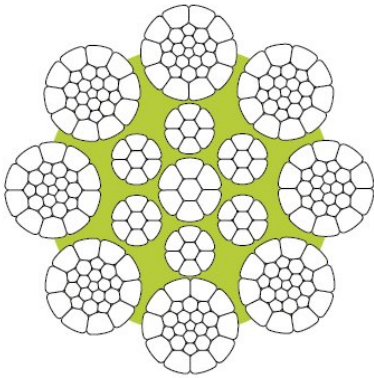

Typical applications: When rotation resistant ropes are not required (twin hoist systems with right and left ropes, small heights). Hoist for steel mill cranes, container cranes, floating cranes and boom hoist for deck cranes, luffing and mobile cranes, grab cranes.

... [Read more](#)

Temperature range: -50°C up to +75°C

Steel wire rope HD8K-PPI

Technical data

Part Code	Rope diameter	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
103102004270640	20	1,960	Galvanized	sZ	355.5	-	-	1.84