

## Weld-on Point 8-057

---

### Product information



The eyes can be loaded with working load limit in all directions, pivots through 180°. Load rated parts are 100% magnaflux crack detected. Individual forged parts are traceable to Test Certification. Proof tested to 2.5 times the WLL, fatigue rated to 1.5 times the WLL. A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibration.

[... Read more](#)

---

**Material:** Manufactured from forged alloy steel, quenched and tempered.


**Marking:** According to standard, CE-marked, WLL, size, steel quality, manufacturer ID and traceability.

**Standard:** EN 1677-1

**Safety factor:** 5:1

## Weld-on Point 8-057

### Blueprint

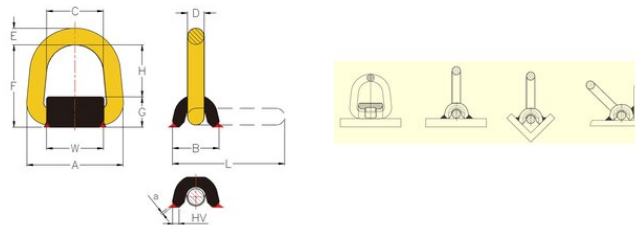

### Technical data

| Part Code   | WLL ton | A mm | B mm | C mm | D mm | E mm | F mm | G mm | H mm | L mm | W mm | HV mm mm | a mm | Weight (kg) |
|-------------|---------|------|------|------|------|------|------|------|------|------|------|----------|------|-------------|
| 421580571T  | 1       | 83   | 41   | 48   | 14   | 14   | 86   | 27   | 58   | 109  | 50   | 5        | 3    | 0.5         |
| 421580573T  | 3       | 98   | 48   | 58   | 17   | 17   | 85   | 31   | 54   | 114  | 58   | 6        | 3    | 0.9         |
| 421580575T  | 5       | 120  | 63   | 66   | 22   | 22   | 118  | 41   | 77   | 157  | 64   | 7        | 3    | 1.3         |
| 421580578T  | 8       | 121  | 73   | 68   | 26   | 26   | 122  | 53   | 69   | 169  | 60   | 10       | 4    | 2.6         |
| 4215805710T | 10      | 146  | 73   | 82   | 20   | 30   | 141  | 53   | 88   | 191  | 75   | 10       | 4    | 2.8         |