


Steel wire rope 6x19M-WSC (7x19)

Product information

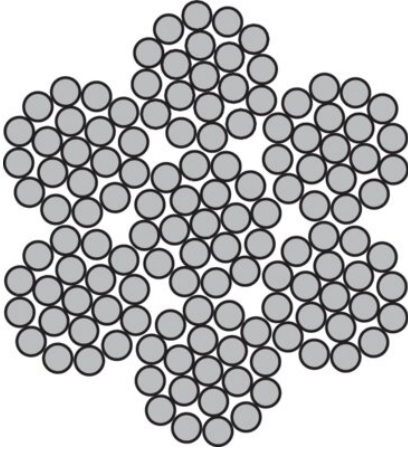

Designed for reliable performance in lifting, rigging, and general industrial applications, it offers a good balance between strength, flexibility, and durability. Suitable for applications where dependable load handling and resistance to wear are required.

[... Read more](#)

Rope construction: Steel wire rope 6x19M+WSC (7x19). Aircraft cable. 1960 N/mm² (200kp/mm²).

Marking: According to standard

Finish: Galvanized.

Standard: EN 12385-4
AS 3569

Fill factor: 0.57

Steel wire rope 6x19M-WSC (7x19)

Technical data

Part Code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/m
101100244270299	2.4	1,960	Galvanized	sZ	3.74	-	SupplierStandard	0.02
101100243270299	2.4	1,960	Galvanized	zS	3.74	-	SupplierStandard	0.02
101100304270299	3	1,960	Galvanized	sZ	5.84	-	SupplierStandard	0.03
101100303270299	3	1,960	Galvanized	zS	5.84	-	SupplierStandard	0.03
101100404270299	4	1,960	Galvanized	sZ	10.39	-	SupplierStandard	0.06
101100403270299	4	1,960	Galvanized	zS	10.39	-	SupplierStandard	0.06
101100504270299	5	1,960	Galvanized	sZ	16.19	-	SupplierStandard	0.09
101100503270299	5	1,960	Galvanized	zS	16.19	-	SupplierStandard	0.09
101100604270299	6	1,960	Galvanized	sZ	23.36	-	SupplierStandard	0.14
101100603270299	6	1,960	Galvanized	zS	23.36	-	SupplierStandard	0.14
101100644270299	6.35	1,960	Galvanized	sZ	26.16	-	SupplierStandard	0.15
101100643270299	6.35	1,960	Galvanized	zS	26.16	-	SupplierStandard	0.15
101100704270299	7	1,960	Galvanized	sZ	31.83	-	SupplierStandard	0.19
101100703270299	7	1,960	Galvanized	zS	31.83	-	SupplierStandard	0.19
101100804270299	8	1,960	Galvanized	sZ	41.49	-	SupplierStandard	0.24
101100803270299	8	1,960	Galvanized	zS	41.49	-	SupplierStandard	0.24
101100904270299	9	1,960	Galvanized	sZ	52.81	-	SupplierStandard	0.31
101100903270299	9	1,960	Galvanized	zS	52.81	-	SupplierStandard	0.31
101100964270299	9.6	1,960	Galvanized	sZ	59.84	-	SupplierStandard	0.35
101100963270299	9.6	1,960	Galvanized	zS	59.84	-	SupplierStandard	0.35
101101004270299	10	1,960	Galvanized	sZ	64.85	-	SupplierStandard	0.38
101101003270299	10	1,960	Galvanized	zS	64.85	-	SupplierStandard	0.38