


Master Link Assembly Pewag VSW 2-4

Product information

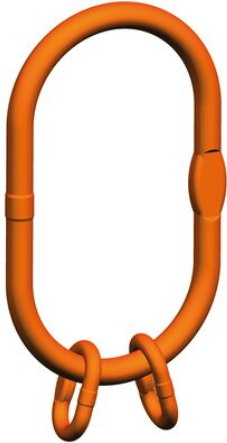

This master link assembly is designed for the effortless creation of II- and IV-leg chain slings in the assembled or welded system. The flattened section on the transition links opens up additional, universal connection possibilities. Extra-large rings make this master link assembly the perfect partner for crane hooks according to DIN 15401 up to no. 40 and according to DIN 15402 up to no. 50. [... Read more](#)

Material: High-alloy quenched and tempered steel

Marking: According to standard, CE-marked, brand, grade

Temperature range: -40° up to +380°


Standard: EN 1677-4
AS 3776

Safety factor: 4:1

Grade: 10

Master Link Assembly Pewag VSW 2-4

Blueprint

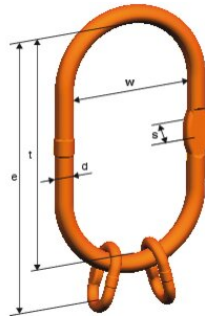

Technical data

Part Code	Code	WLL ton	For chain mm, 2-leg	For chain mm, 3-4-leg	d mm	e mm	s mm	t mm	w mm mm	Weight (kg)
402100560730	VSW 2-10 / 4-8	5.6	10	8	30	515	24	430	220	8.16
402100950730	VSW 2-13 / 4-10	9.5	13	10	33	515	26	430	220	9.66
402101400730	VSW 2-16 / 4-13	14	16	13	36	545	29	430	220	12.32
402102120730	VSW 2-19/20 / 4-16	21.2	19/20	16	45	570	-	430	220	19.54